

Note:<注意>

Mechanical:<机械性能>

.Contact force: 80g±20g at 1.1mm working stroke

<接触弹力: 80g±20g在1.1mm的工作行程>

.Full stroke: 1.6mm

<最大行程: 1.6mm>

.Life test: 100,000 cycles

<寿命: 100000次>

Electrical:<电气性能>

.Rated current & voltage: DC 12V, 2A

<额定电压, 电流: DC 12V, 2A>

.Contact resistance: 50 milliohm Max.

<接触阻抗: 50 milliohm Max.>




100% open & short test.

<100%导通,短路测试>

专利号: ZL201420146582.X



Approve Sign

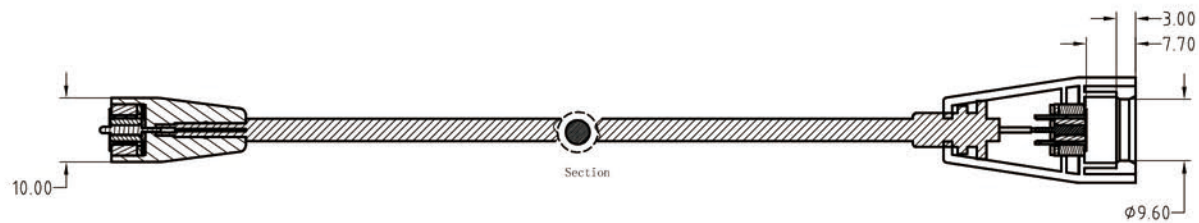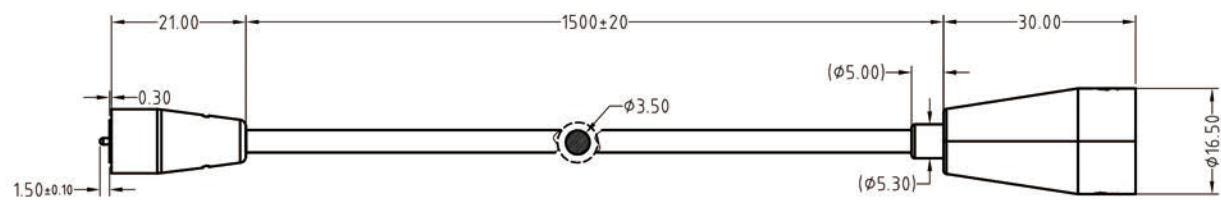

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.			东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±2°	A4	SHEET: 1 of 1			PART NO.	CM-BP60641-01000H0E
0~6	±0.10				FILE NAME	BP606XX	
6~30	±0.20	DRAW			TITLE	Magnetic Cable Connector	
30~150	±0.30	CHECK					
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO					

ECN(DCN) NO.	D0	2017.03.15	NEW
	REV	DATE	DESCRIPTION