

Note:<注意>

Mechanical:<机械性能>

.Contact force: 80g±20g at 2.0mm working stroke

<接触弹力: 80g±20g在2.0mm的工作行程>

.Life test: 20,000 cycles

<寿命: 20000次>

Electrical:<电气性能>

.Rated current & voltage: DC 12V, 2A







<额定电压, 电流: DC 12V, 2A>

.Contact resistance: 50 milliohm Max.

<接触阻抗: 50 milliohm Max.>

100% open & short test.

<100%导通,短路测试>

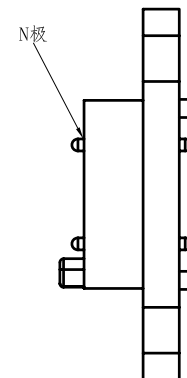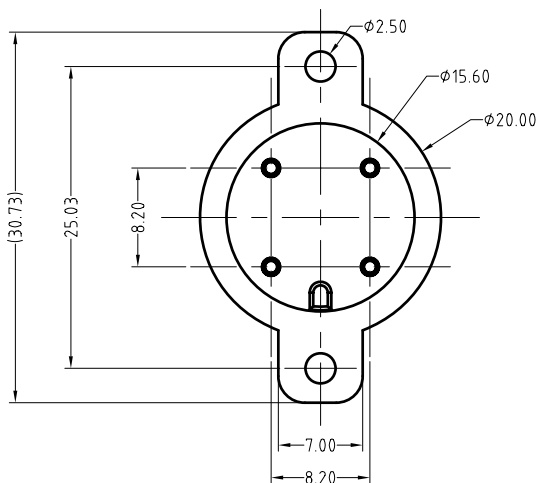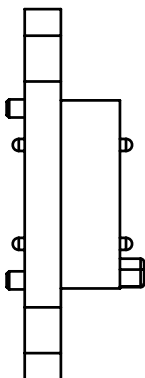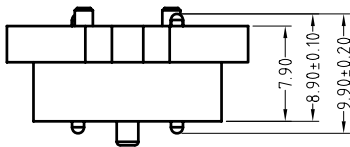

3	Pogo pin plating 0.75um Au <弹簧针 电镀金0.75um>	BD59721	4
2	N45 NdFeB Magnet plating Ni <N45 钕铁硼磁铁 表面镀镍>	B597-M1100	1
1	Black ABS UL94 V-0 <黑色ABS UL94 V-0>	B597-H1001	1
序号 <NO.>	规格 <Specification>	料号 <P/N>	数量 <Qty>

(A1)

(A1)

	A1	2016.11.18	修改电镀膜厚及磁铁等级
	A0	2016.08.24	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±2°	A4	SHEET: 1 of 1	
0~6	±0.10		PART NO.	M-BP59781-04820H0A
6~30	±0.20	DRAW	FILE NAME	BP597XX
30~150	±0.30	CHECK	TITLE.	Pogo pin Connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

