

Note:<注意>

Mechanical:<机械性能>




- .Contact force: 80g±20g at 1.1mm working stroke
- <接触弹力: 80g±20g在1.1mm的工作行程>
- .Full stroke: 1.6mm
- <最大行程: 1.6mm>
- .Life test: 50,000 cycles
- <寿命: 50000次>

Electrical:<电气性能>


- .Rated current & voltage: DC 12V, 2A
- <额定电压, 电流: DC 12V, 2A>
- .Contact resistance: 50 milliohm Max.
- <接触阻抗: 50 milliohm Max.>
- 100% open & short test.
- <100%导通,短路测试>



Approve Sign

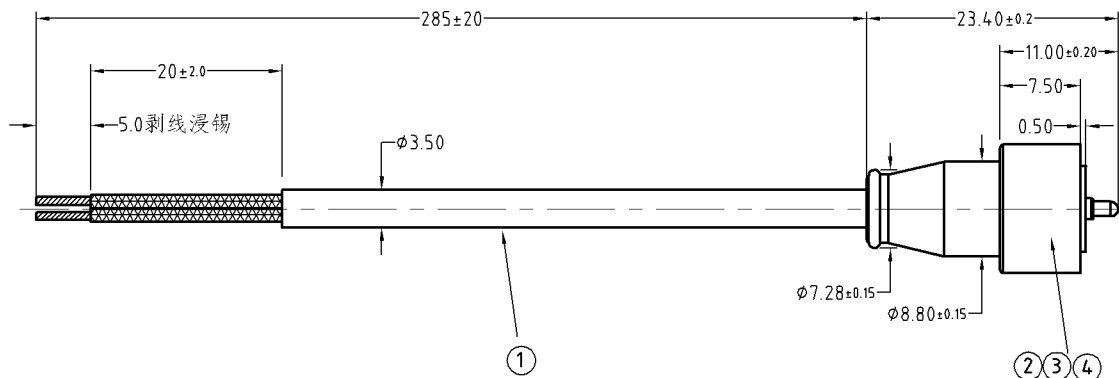

接线方式



4	Pogo Pin connector 磁吸接头	M-BP14211-01000H0C	1
3	Black PVC 45P 5g 黑色外被 PVC 45P 5克	B000-P0002	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	UL2464 OD3.5 2C 22AWG BlackJacket PVC 5SP 345mm UL2464 OD3.5 2芯 22AWG 黑色外被PVC 5SP 345mm>	X002-0208-XXXX	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2016.05.07	NEW

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±2°	A4	SHEET: 1 of 1	
0~6	±0.10		PART NO.	CM-BP62611-01000H0A
6~30	±0.20	DRAW	FILE NAME	BP626XX
30~150	±0.30	CHECK	TITLE	Magnetic Cable Connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.