

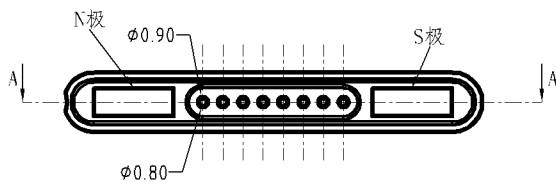
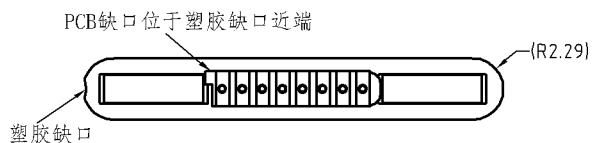
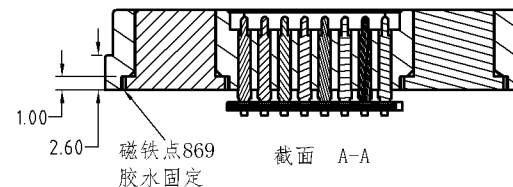



Note:
 Materials:
 .Insulator: Black high temperature plastics UI94 V-0
 .Plunger & Plug: Brass 0.25um Au over Ni
 Barrel: Brass 0.25um Au over Ni
 Spring: SUS Au
 Mechanical:
 .Contact force: 50g±20g at 0.7mm working stroke
 .Life test: 100,000 cycles
 Electrical:
 .Rated current & voltage: DC 12V; 1A Max.
 .Contact resistance: 50 milliohm Max.

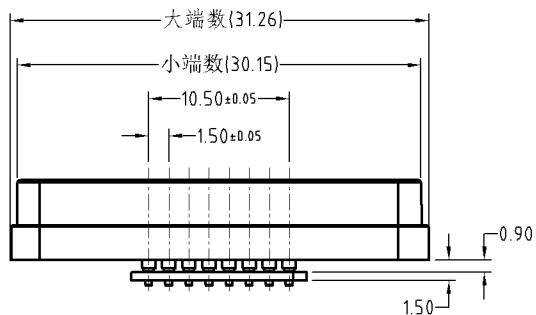

Approve Sign



3	N52 NdFeB Magnet plating Ni-Cu-Ni <N52 钕铁硼磁铁 表面镀镍铜镍>	B647-M2102	1
2	N52 NdFeB Magnet plating Ni-Cu-Ni <N52 钕铁硼磁铁 表面镀镍铜镍>	B647-M1101	1
1	Pogo pin plating 0.25um Au+Housing+PCB <弹簧针 电镀金0.25um 装入胶芯 焊接PCB>	M-BP64702-08150H0B	1
序号 <NO.>	规格 <Specification>	料号 <P/N>	数量 <Qty>

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±2°	A4	SHEET: 1 of 1	
0~6	±0.10			
6~30	±0.20	DRAW	PART NO.	M-BP64701-08150H0A
30~150	±0.30	CHECK	FILE NAME	BP647XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	TITLE	Pogo pin Connector

CFE 东莞市川富电子有限公司
 CFE CORPORATION CO.,LTD.

_____	T1	2016.07.21	PIN针改为DIP式
_____	A0	2016.07.19	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION