




Note:<注意>  
 Electrical:<电气性能>  
 .Rated current & voltage: DC 52V, 3A Max.  
 <额定电压, 电流: DC 52V, 3A Max.>  
 .Contact resistance: 50 milliohm Max.  
 <接触阻抗: 50 milliohm Max.>  
 100% open & short test.  
 <100%导通,短路测试>



Approve Sign

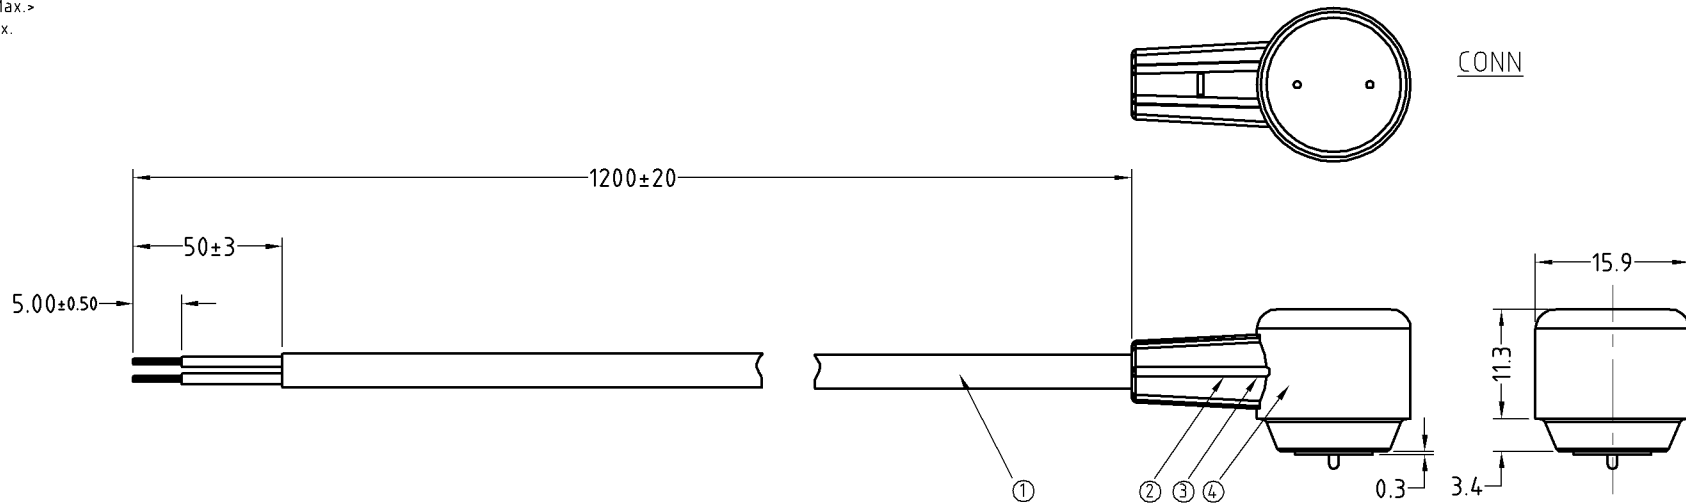

Line→CONN
Red - - - Pogo pin
Black - - - Pipe

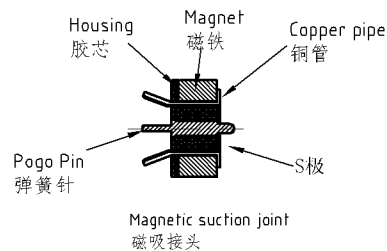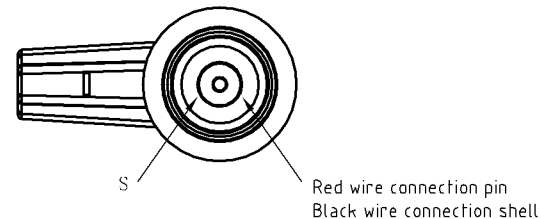

4	142 pogo pin Magnetic suction joint <142pogopin磁吸接头>	M-BP14.211-01000H0B	1
3	Black PVC 4.5P 5g <黑色 PVC 4.5P 5克>	B000-P0002	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	OD4.0 2C 20AWG Black Jacket PVC 55P <OD4.0 2C 20AWG 黑色PVC外被 55P>	X002-0206-XXXX	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	<b>CFE</b> 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.
ANGEL	±2°	A4		
0-6	±0.10			
6-30	±0.20	DRAW	PART NO.	CM-BP544.11-01000H0D
30-150	±0.30	CHECK	FILE NAME	BP544XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO	TITLE	Magnetic Cable Connector	

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	D0	2016.08.09	NEW