

Note:<注意>

Electrical:<电气性能>

.Rated current & voltage: DC 52V, 3A Max.

<额定电压, 电流: DC 52V, 3A Max.>

.Contact resistance: 50 milliohm Max.



<接触阻抗: 50 milliohm Max.>

100% open & short test.

<100%导通,短路测试>




Approve Sign

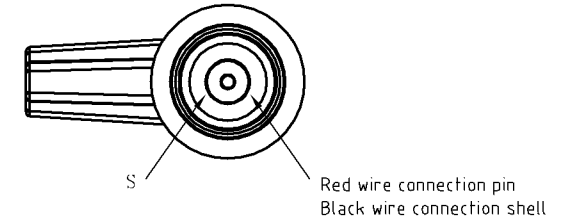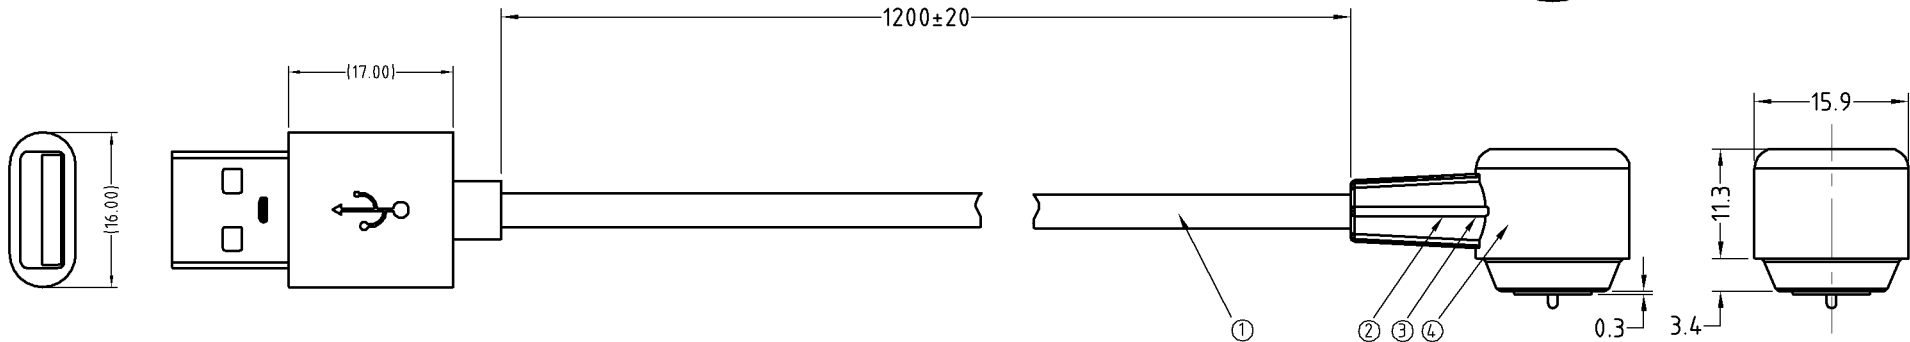

7	142 pogo pin Magnetic suction joint <142pogopin磁吸接头>	M-BP14211-01000H0B	1
6	White PVC 45P 5g <白色 PVC 45P 5克>	B000-P0001	1
5	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
4	OD4.0 2C 20AWG White Jacket PVC 55P 1240MM <OD4.0 2C 20AWG 白色PVC外被 55P 长1240MM>	X002-0106-XXXX	1
3	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
2	White PVC 45P 5g <白色 PVC 45P 5克>	B000-P0001	1
1	USB/AM 0.025um Au white salt spray test 48H <USB/AM 0.025um金 白色 盐雾24小时>	B000-L1001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

P1→wire→P2
Vcc_1- Red ----- 1
GND 4-Black ----- 4

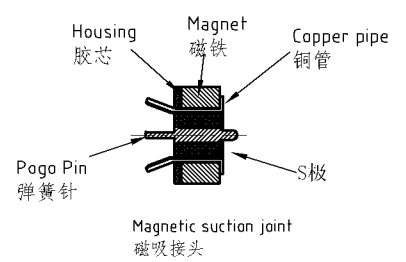

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±2°	A4			
0-6	±0.10		SHEET: 1 of 1	PART NO.	CM-BP54421-01000H0A
6-30	±0.20	DRAW		FILE NAME	BP544XX
30-150	±0.30	CHECK		TITLE	Magnetic Cable Connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			APPRO		

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	D0	2017.06.01	NEW