



Note:<注意>
 Mechanical:<机械性能>
 .Contact force: 40g±20g at 0.6mm working stroke
 <接触弹力: 40g±20g在0.6mm的工作行程>
 .Life test: 50,000 cycles
 <寿命: 50000次>
 Electrical:<电气性能>
 .Rated current & voltage: DC 12V, 2A Max.
 <额定电压, 电流: DC 12V, 2A>
 .Contact resistance: 50 milliohm Max.
 <接触阻抗: 50 milliohm Max.>
 100% open & short test.
 <100%导通, 短路测试>



Approve Sign

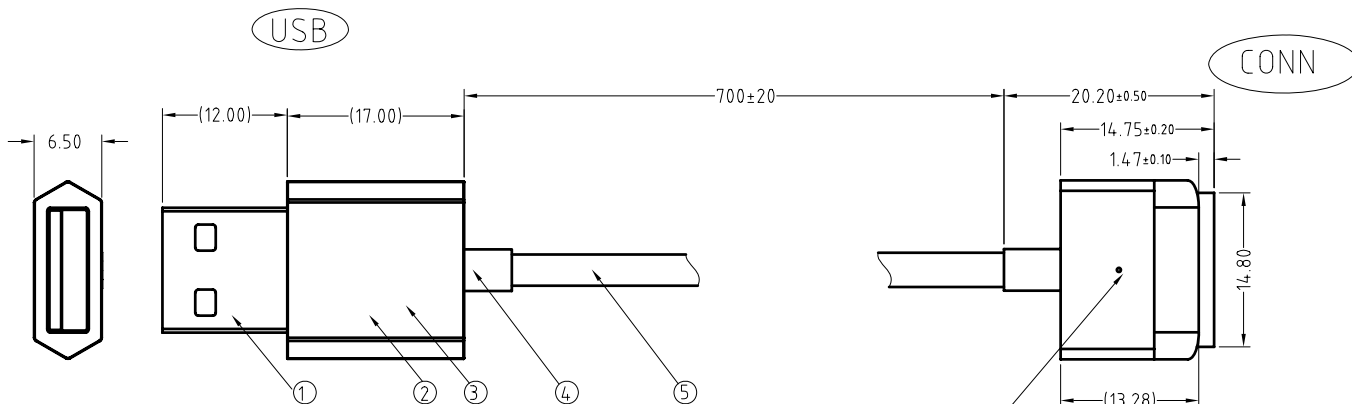

Magnetic attraction force: 900g±20g.
 <磁吸力900g±20g>



12	SR White TPE <SR 白色TPE>	B430-H3000	1
11	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
10	Pogo pin plating 0.25um Au <弹簧针 电镀金0.25um>	BP43041	5
9	PCB+LED <PCB板+LED>	B430-F1000	1
8	Housing white PA46 <胶芯 白色PA46>	B430-H1000	1
7	Magnet N48 plating Ni-Cu-Ni <磁铁 N48 表面镀镍铜镍>	B430-M1100	1
6	CONN Al-alloy anodic oxidation <CONN 铝合金外壳 阳极氧化>	B777-A1001	1
5	NO UL 4C 2C*AWG24 2C*AWG28 OD2.90 white TPE 740mm <NO UL 4C 2C*AWG24 2C*AWG28 OD2.90 白色TPE 740mm>	X004-0106-XXXX	1
4	SR White TPE <SR 白色TPE>	B430-H3000	1
3	USB Al-alloy anodic oxidation <USB铝合金外壳 阳极氧化>	B430-A3200	1
2	Lucency PE 3g <透明 PE 3克>	B000-90001	1
1	USB/AM 0.025um Au white salt spray test 48H <USB/AM 0.025um金 白色 盐雾24小时>	B000-U1001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

USB→wire→CONN	
Vcc_1- Red	---→ 1
D-_2-White	---→ 2
D+_3-Green	---→ 3
GND_4-Black	---→ 4

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0~6	±0.10		SHEET: 1 of 1	PART NO.	CM-BP77711-05150H0C
6~30	±0.15	DRAW		FILE NAME	BP777XX
30~150	±0.20	CHECK		TITLE.	Magnetic Cable Connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

	D1	2016.10.18	修改接头外形
	D0	2016.10.13	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION