

Note:<注意>

Mechanical:<机械性能>

.Contact force: 70g±20g at 1.0mm working stroke

<接触弹力: 70g±20g在1.0mm的工作行程>

.Life test: 20,000 cycles

<寿命: 20000次>

Electrical:<电气性能>

.Rated current & voltage: DC 12V, 1A

<额定电压, 电流: DC 12V, 1A>

.Contact resistance: 50 milliohm Max.

<接触阻抗: 50 milliohm 最大.>

100% open & short test.

<100%导通,短路测试>




A

B


C

D

USB

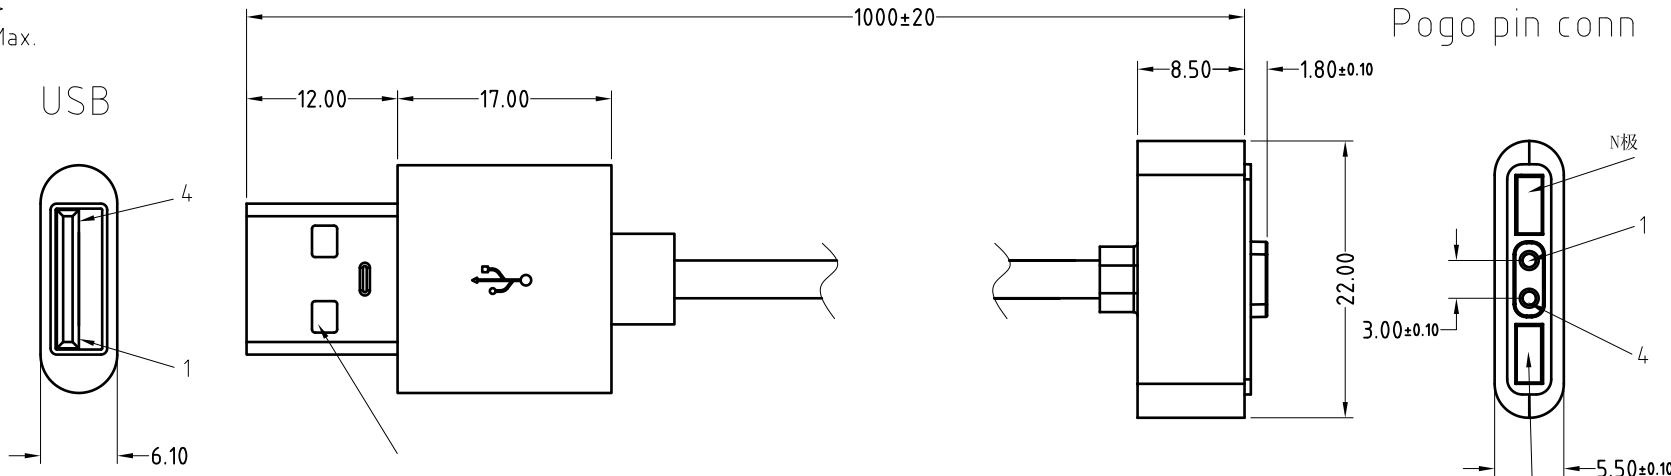

PIN OUTS

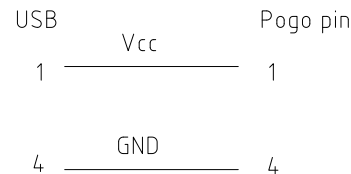

S Docking magnet force 500 g. (S极 对接端吸附力为500g)

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A2	2015.07.14	Pogo Pin 修改
	A1	2015.1.6	线材长度改变: (A0) 1800→(A1)1000
	A0	2014.11.19	NEW

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4	SHEET: 1 of 1	PART NO.	CM-BP24111-02300H0A
0~6	±0.10			FILE NAME	BP241XX
6~30	±0.20	DRAW		TITLE	Pogo pin connector
30~150	±0.30	CHECK			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			APPRO		