

Note:

Mechanical:

.Contact force: 40g±20g at 0.6mm working stroke

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.

100% open & short test.

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.

A


B

C

D



Approve Sign

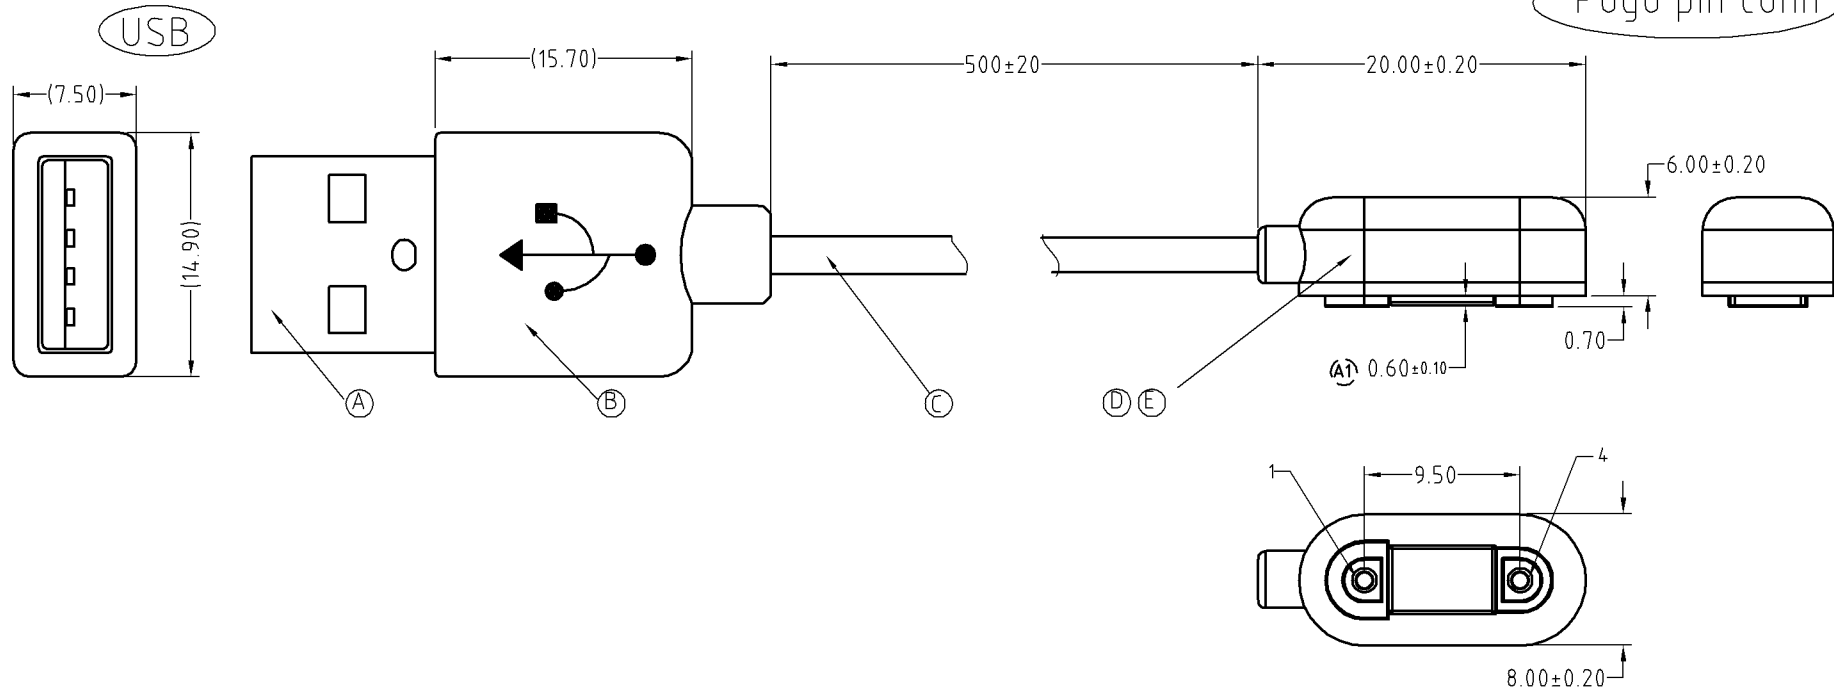

BOM		
序号	规格	数量
E	磁铁接头: M-BP33011-02950H0C	1
D	黑色胶芯 PVC	1
C	NO UL 2C 8*0.08 OD2.0 黑色PVC	1
B	黑色 PVC RoHS	1
A	USB/AM公焊线式1U" ROHS 盐雾48小时	1

USB→Pogo pin conn
1_Vcc_1
4_GND_4

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.
ANGEL	±1°	A4		
0~6	±0.10			
6~30	±0.15	DRAW	PART NO.	CM-BP33011-02950H0C
30~150	±0.20	CHECK	FILE NAME	BP330XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO		TITLE.	Magnetic Cable Connector

	A1	2015.07.08	增加磁铁外露尺寸
	A0	2015.06.26	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION