

Note:

Mechanical:

.Contact force: 40g±20g at 0.4mm working stroke

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.




100% open & short test.

To ensure the best usage, please operate it based on the working height.


Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

USB

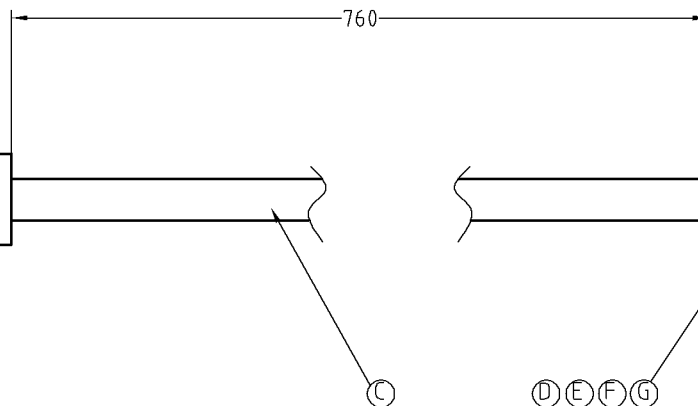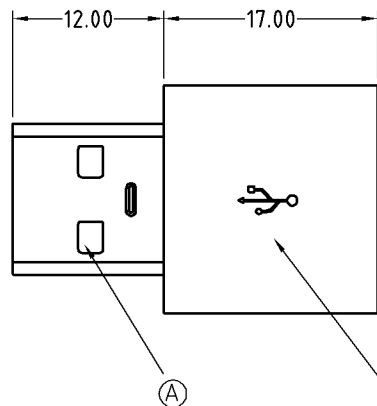

Pogo pin conn

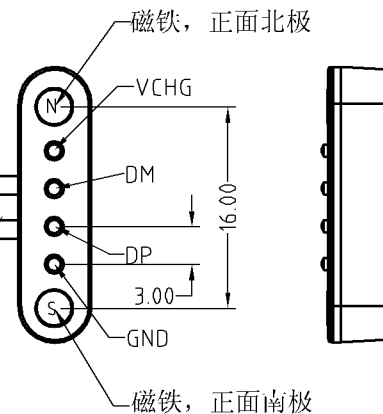

PIN OUTS

USB	Red	Pogo pin conn
VCHG	Green	VCHG
DM-	Blue	DM-
DP+	Yellow	DP+
GND		GND

BOM		
序号	规格	数量
E	Pogo pin	4
E	磁铁 N48 表面镀镍	2
D	黑色胶芯 RoHS	1
D	黑色胶芯 RoHS	1
C	线材规格外径 1.3×3.2扁线×4C 黑色 TPE	1
B	黑色 TPE RoHS	1
A	USB/AM公焊线式1U" ROHS 盐雾48小时	1

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.
ANGEL	±1°	A4		
0~6	±0.05		SHEET: 1 of 1	
6~30	±0.10	DRAW		PART NO. CM-BP34911-04300H0A
30~150	±0.15	CHECK		FILE NAME BP349XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			APPRO	TITLE Pogo pin connector

ECN(DCN) NO.	D0	2015.16	NEW
REV	DATE	DESCRIPTION	