

1

2

3

4


Note:<注意>
 Mechanical:<机械性能>
 .Contact force: 80g±20g at 0.9mm working stroke
 (接触弹力: 80g±20g在0.9mm的工作行程)
 .Full stroke:1.10mm
 <最大行程: 1.10mm>
 .Life test: 20,000 cycles
 <寿命: 20000次>
 Electrical:<电气性能>
 Rated current & voltage: DC 12V, 1A
 <额定电压, 电流: DC 12V, 1A>
 .Contact resistance: 50 milliohm Max.
 <接触阻抗: 50 milliohm Max.>
 100% open & short test.
 <100%导通,短路测试>



Approve Sign

USB

CONN

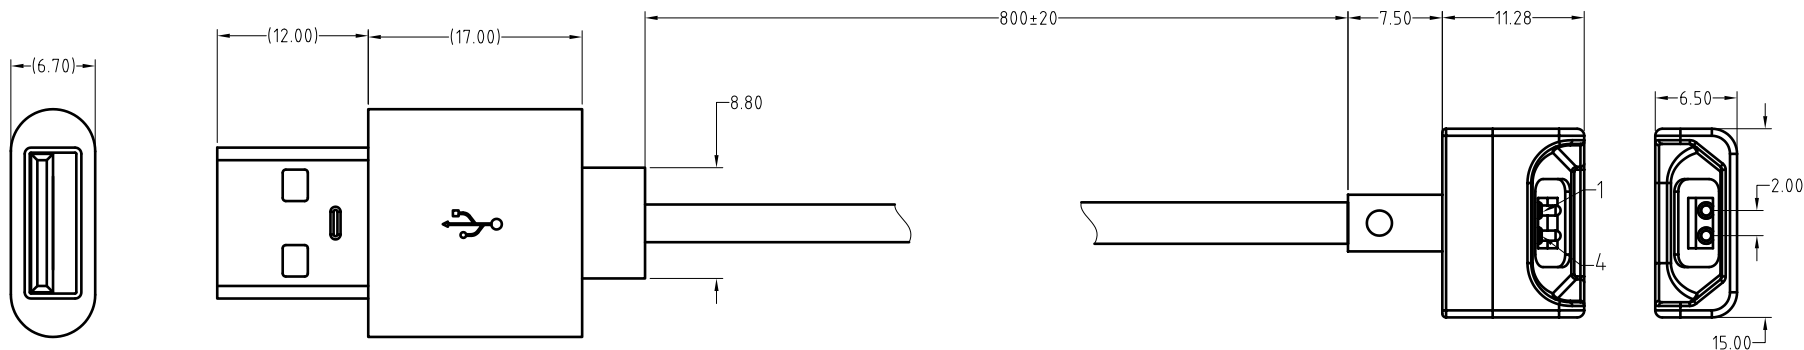

USB→CONN
1_Vcc_Red_1
4_GND_Black_4

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.
ANGEL	±2°	A4		
0~6	±0.10		SHEET: 1 of 1	
6~30	±0.20	DRAW		PART NO. CM-BP5111-02200H0C
30~150	±0.30	CHECK		FILE NAME BP511XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		TITLE. Magnetic Cable Connector

_____	D1	2015.10.14	NEW
_____	D0	2015.08.20	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION