

Note:<注意>

Mechanical:<机械性能>

.Contact force: 90g±20g at 0.9mm working stroke  
 <接触弹力: 90g±20g在0.9mm的工作行程>  
 .Full stroke:1.10mm  
 <最大行程: 1.10mm>  
 .Life test: 20,000 cycles  
 <寿命: 20000次>


Electrical:<电气性能>

.Rated current & voltage: DC 12V, 2A  
 <额定电压, 电流: DC 12V, 2A>  
 .Contact resistance: 50 milliohm Max.  
 <接触阻抗: 50 milliohm Max.>  
 100% open & short test.  
 <100%导通,短路测试>

To ensure the best usage, please operate it based on the working height.(为保最佳应用, 请基于工作高度使用)  
 Based on the engineering drawings, shall not exceed the maximum allowed compression. (基于工程图纸, 不要超出最大允许压缩行程)

USB

CONN

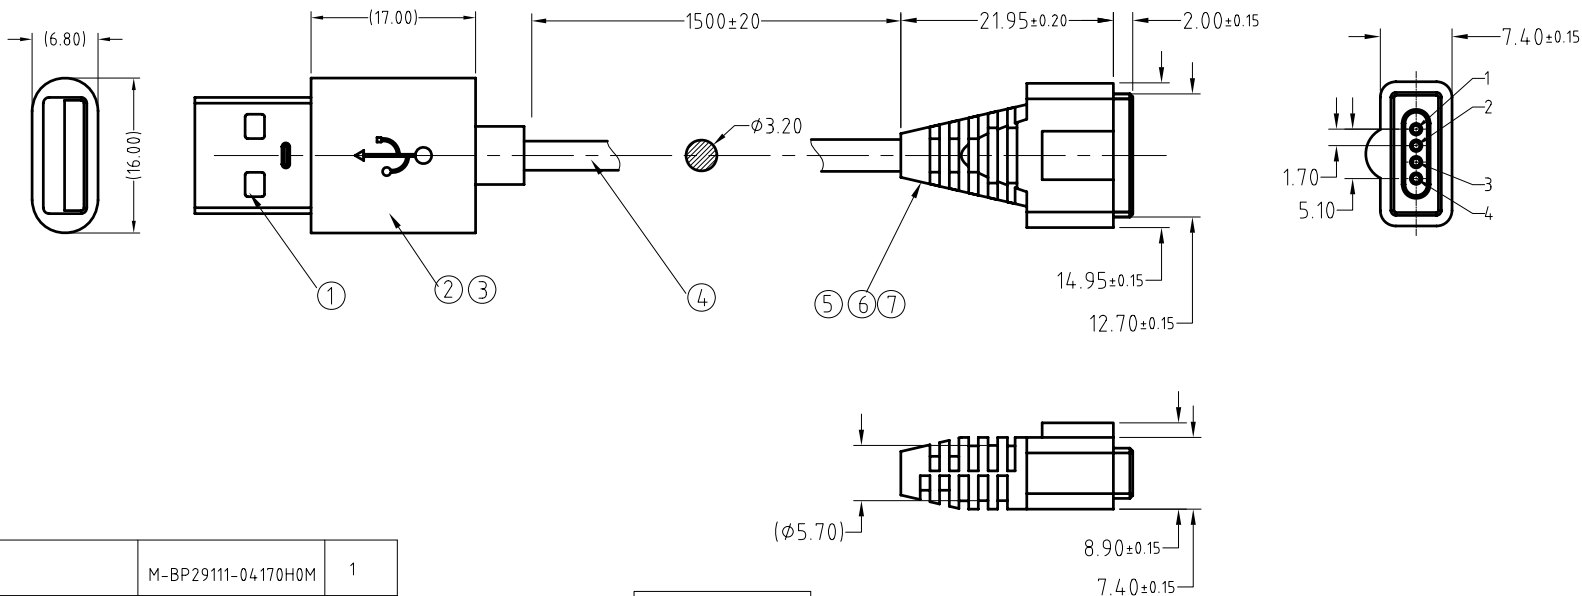

7	Alloy joint <合金接头>	M-BP29111-04170H0M	1
6	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
5	Black PVC 45P 5g <黑色 PVC 45P 5克>	B000-P0002	1
4	OD3.2 2C 24AWG 2C 28AWG Black Jacket PVC 55P 154.0mm <OD3.2 2芯 24AWG 2芯28AWG黑色外被PVC 55P 154.0mm>	X004-0202-XXXX	1
3	Black PVC 45P 4g <黑色 PVC 45P 4克>	B000-P0002	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	USB/AM 0.025um Au Black salt spray test 48H <USB/AM 0.025um金 黑色盐雾48小时>	B000-U2001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

USB→Pogo pin conn

1_Vcc_Red_1
2_D_White_2
3_D+Green_3
4_GND_Black_4

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±1°	A4	
0~6	±0.10		SHEET: 1 of 1
6~30	±0.15	DRAW	
30~150	±0.20	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

**CFE** 东莞市川富电子有限公司  
 CFE CORPORATION CO.,LTD.

PART NO. CM-BP64011-04170H0A

FILE NAME BP640XX

TITLE. Magnetic cable/磁吸充电线

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2016.05.05	NEW