


Note: <注意>
 Mechanical: <机械性能>
 . Contact force: 70g±20g at 1.0mm working stroke
 <接触弹力: 70g±20g在1.0mm的工作行程>
 . Full stroke: 1.40mm
 <最大行程: 1.40mm>
 . Life test: 50,000 cycles
 <寿命: 50000次>
 Electrical: <电气性能>
 . Rated current & voltage: DC 12V, 0.5A Max.
 <额定电压, 电流: DC 12V, 0.5A>
 100% open & short test.
 <100%导通, 短路测试>




Approve Sign

P1

P2

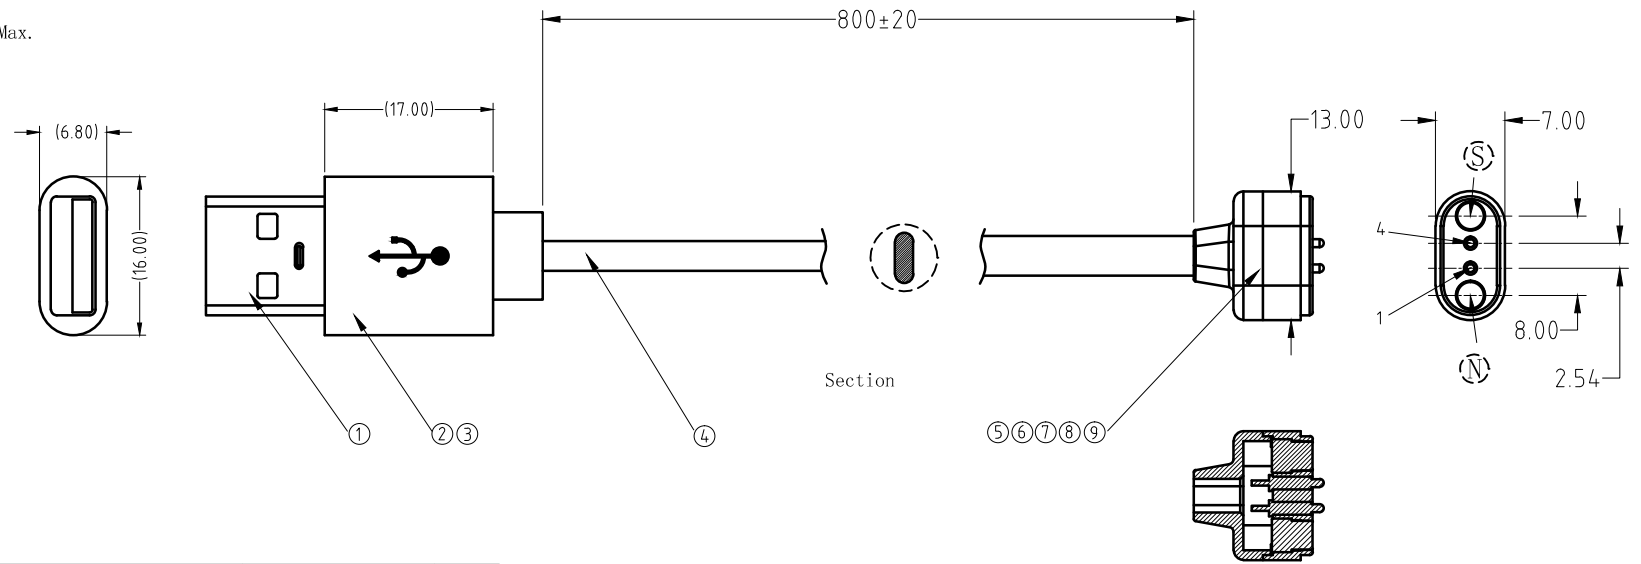

9	Pogo pin plating 0.125um <弹簧针 电镀金0.125um>	MP82011-1111	1
8	N52 NdFeB Magnet plating Ni <N52 钕铁硼磁铁 表面镀Ni>	B349-E2100	2
7	N52 NdFeB Magnet plating Ni <N52 钕铁硼磁铁 表面镀Ni>	B349-E1100	1
6	黑色ABS手板	B997-H2001	1
5	黑色ABS手板	B997-H1001	1
4	1.3*3.2 2C 8*0.08 Black PVC 55P 840mm <1.3*3.2 2C 8*0.08 黑色外被PVC 55P 840mm>	X102-0201-XXXX	1
3	Black PVC 45P <黑色PVC外被 45P>	B000-P0004	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	USB/AM 0.025um Au Black salt spray test 48H <USB/AM 0.025um金 黑色 盐雾24小时>	B000-U2001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)



SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±2°	A4	
0~6	±0.10		SHEET: 1 of 1
6~30	±0.20	DRAW	
30~150	±0.30	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

CFE 东莞市川富电子有限公司
 CFE CORPORATION CO.,LTD.

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	D0	2017.03.20	NEW

PART NO.	CM-BF99701-02254H0A
FILE NAME	BF997XX
TITLE.	Magnetic Cable Connector