

Note:<注意>

Mechanical:<机械性能>








.Contact force: 70g±20g at 1.0mm working stroke
 <接触弹力: 70g±20g在1.0mm的工作行程>
 .Full stroke:1.40mm
 <最大行程: 1.40mm>
 .Life test: 20,000 cycles
 <寿命: 20000次>

Electrical:<电气性能>

.Rated current & voltage: DC 19V, 3A
 <额定电压, 电流: DC 19V, 3A>
 .Contact resistance: 50 milliohm Max.
 <接触阻抗: 50 milliohm Max.>
 100% open & short test.
 <100%导通,短路测试>



Approve Sign

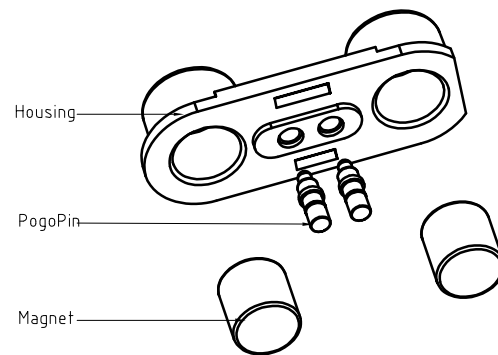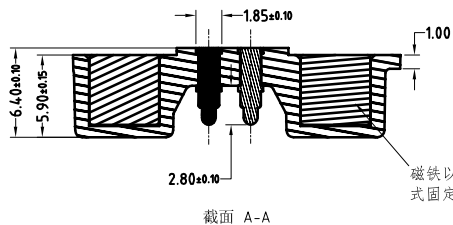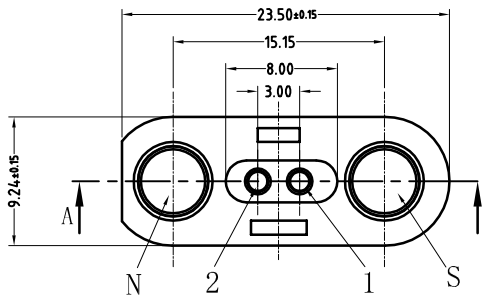

CONN→CONN
Vcc+_1 → 1 RED
GND-_2 → 2 Black

3	White HTN UL94 V-0 <白色 HTN UL94 V-0>	B625-H3000	1
2	Pogo pin plating 0.125um Au <弹簧针 电镀金0.125um>	BP62521	2
1	N52 NdFeB Magnet plating Ni <N52 钕铁硼磁铁 表面镀镍>	B625-M3100	2
序号 <NO.>	规格 <Specification>	料号 <P/N>	数量 <Qty>

_____	D2	2016.04.15	修改胶芯尺寸
_____	D1	2016.04.08	修改磁铁胶芯尺寸
_____	D0	2016.03.30	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±2°	A4	
0~6	±0.10		SHEET: 1 of 1
6~30	±0.20	DRAW	
30~150	±0.30	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

CFE 东莞市川富电子有限公司
 CFE CORPORATION CO.,LTD.

PART NO.	M-BP62501-02300H0F
FILE NAME	BP625XX
TITLE.	Pogo pin Connector