

1

2

3

4

Note:<注意>

Mechanical:<机械性能>

.Contact force: 70g±20g at 1.0mm working stroke

<接触弹力: 70g±20g在1.0mm的工作行程>

.Full stroke:1.40mm

<最大行程: 1.40mm>

.Life test: 20,000 cycles

<寿命: 20000次>

Electrical:<电气性能>

.Rated current & voltage: DC 12V, 1A




<额定电压, 电流: DC 12V, 1A>

.Contact resistance: 50 milliohm Max.


<接触阻抗: 50 milliohm 最大.>

100% open & short test.

<100%导通,短路测试>

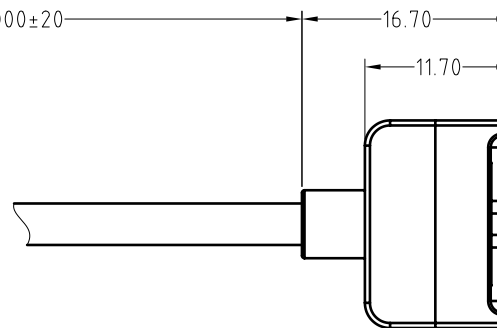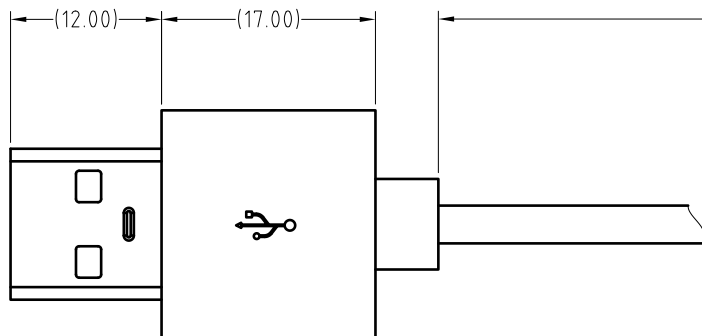


Pogo pin conn



PIN OUTS

USB

Pogo pin conn



_____	A0	2015.1.21	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±1°	A4	
0~6	±0.10		SHEET: 1 of 1
6~30	±0.15	DRAW	
30~150	±0.20	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

CFE 东莞市川富电子有限公司
CFE CORPORATION CO.,LTD.

PART NO.	CM-BP32111-02270H0A
FILE NAME	BP321XX
TITLE.	Pogo pin connector