

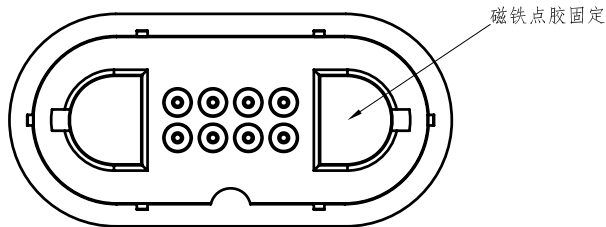

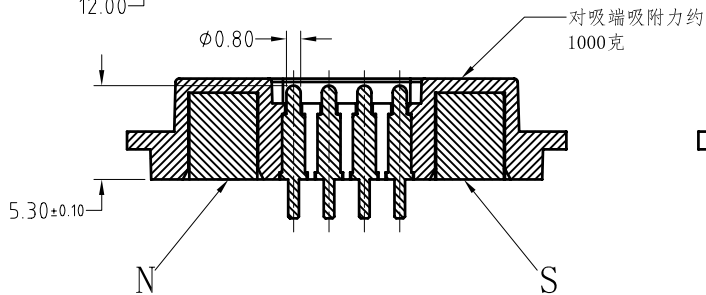
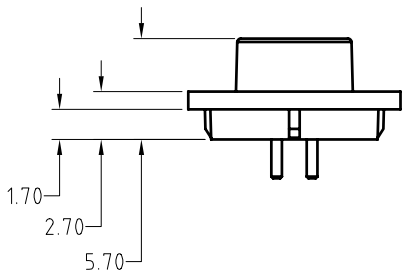


Note: <注意>  
 Mechanical: <机械性能>  
 .Single pin spring force: 70g±20g at 1.0mm working stroke  
 <单针弹力: 70g±15g在1.0mm的工作行程>  
 .Mechanical Life : 50,000 cycles  
 <机械寿命: 50000次>  
 Electrical: <电气性能>  
 .Rated current & voltage: DC 12V, 1A Max.  
 <额定电压, 电流: DC 12V, 1A>  
 .When the current is greater than 1A then need to increase the time delay circuit(3 second)  
 <100% 导通, 短路测试>

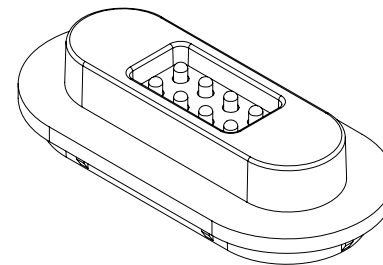

Approve Sign

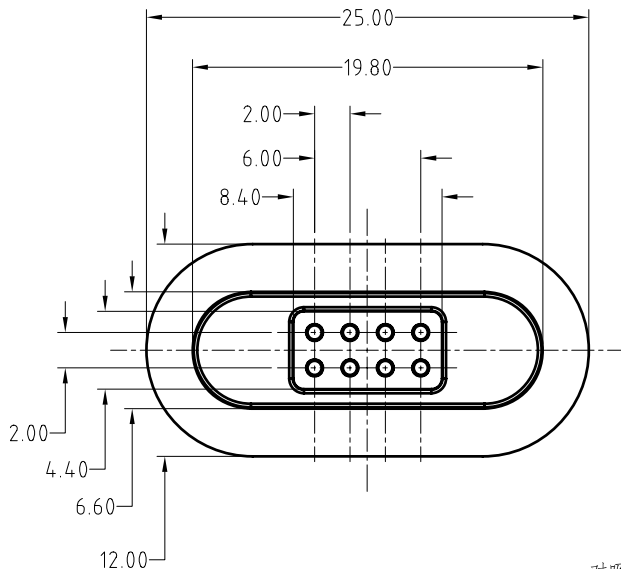

3	Pogo pin plating 0.125um Au <弹簧针 电镀金0.125um>	BP121011	8
2	N52 NdFeB Magnet plating Zn <N52 钕铁硼磁铁 表面镀锌>	0200018-1000	2
1	Black HTN UL94 V-0 <黑色 HTN UL94 V-0>	0300050-1000	1
序号 <NO.>	规格 <Specification>	料号 <P/N>	数量 <Qty>

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		
ANGEL	±2°	A4			
0~6	±0.10			SHEET: 1 of 1	
6~30	±0.20	DRAW		PART NO.	MMA011201-08A1A0
30~150	±0.30	CHECK		FILE NAME	MXA0112
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		TITLE	Magnetic connector/磁吸连接器

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2017.12.07	NEW