

Note: <注意>

Mechanical: <机械性能>

.Single pin spring force: 40g±20g at 1.0mm working stroke

<单针弹力: 40g±20g在1.0mm的工作行程>

.Mechanical Life : 50,000 cycles

<机械寿命: 50000次>

Electrical: <电气性能>

.Rated current & voltage: DC 5V, 1A .

<额定电压, 电流: DC 12V, 1A>


.When the current is greater than 1A then need to increase the time delay circuit(3 second)

100% open & short test.

<100%导通, 短路测试>



Approve Sign

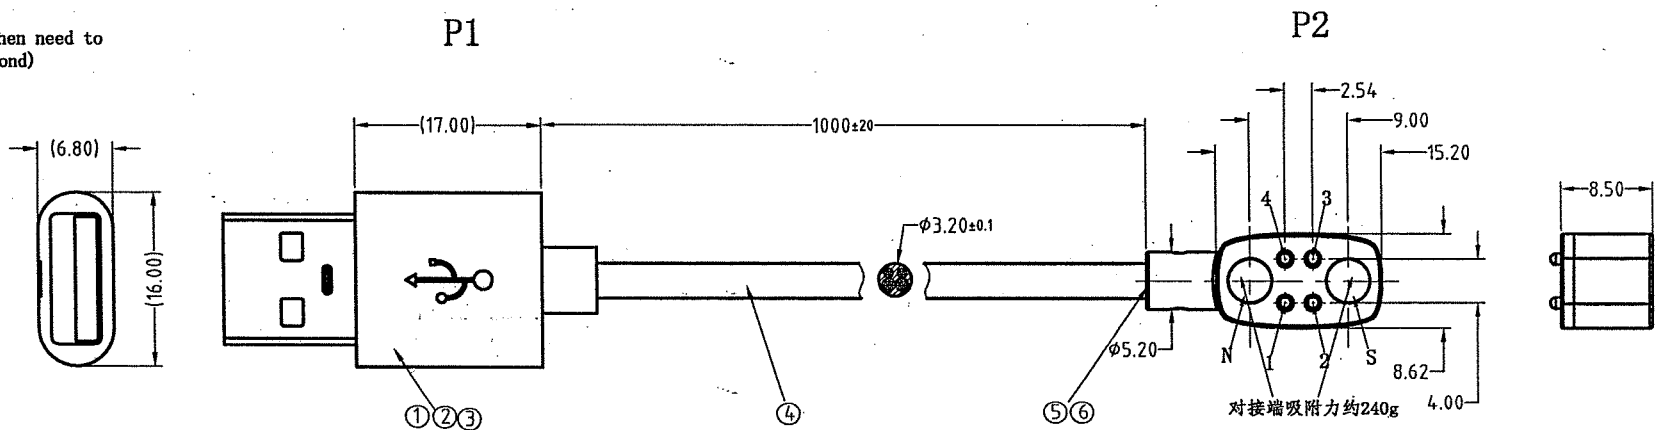

6	Magnetic Connector 磁吸接头	MMA009001-04A1A0	1
5	Black PVC 35P <黑色PVC 35p>	B000-P0007	5g
4	OD3.2 2C 24AWG 2C 28AWG Black Jacket PVC 70P <OD3.2 2芯24AWG 2芯28AWG 黑色 外被PVC 70P>	X004-0219-XXXX	1040mm
3	Black PVC 45P <黑色PVC 45p>	B000-P0002	5g
2	Lucency PE <透明 PE >	B000-P9001	3g
1	USB/AM 0.025um Au black salt spray test 48H <USB/AM 0.025um金 黑色 盐雾48小时>	B000-U2001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

P1→wire→P2

Vcc_1- Red	---	1
D_-2-White	---	2
D+_3-Green	---	3
GND_4-Black	---	4

东莞市川富电子有限公司
2017.09.21
文件受控章

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2017.09.21	NEW

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD. AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±2°	A4	
0~6	±0.10		
6~30	±0.20		
30~150	±0.30		SHEET: 1 of 1
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO		

CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
PART NO.	CMA-010901-04A1A0
FILE NAME	CMA-0109
TITLE.	Magnetic cable/磁吸充电线