

Note:

Electrical:

.Rated current & voltage: DC 12V; 2A


.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

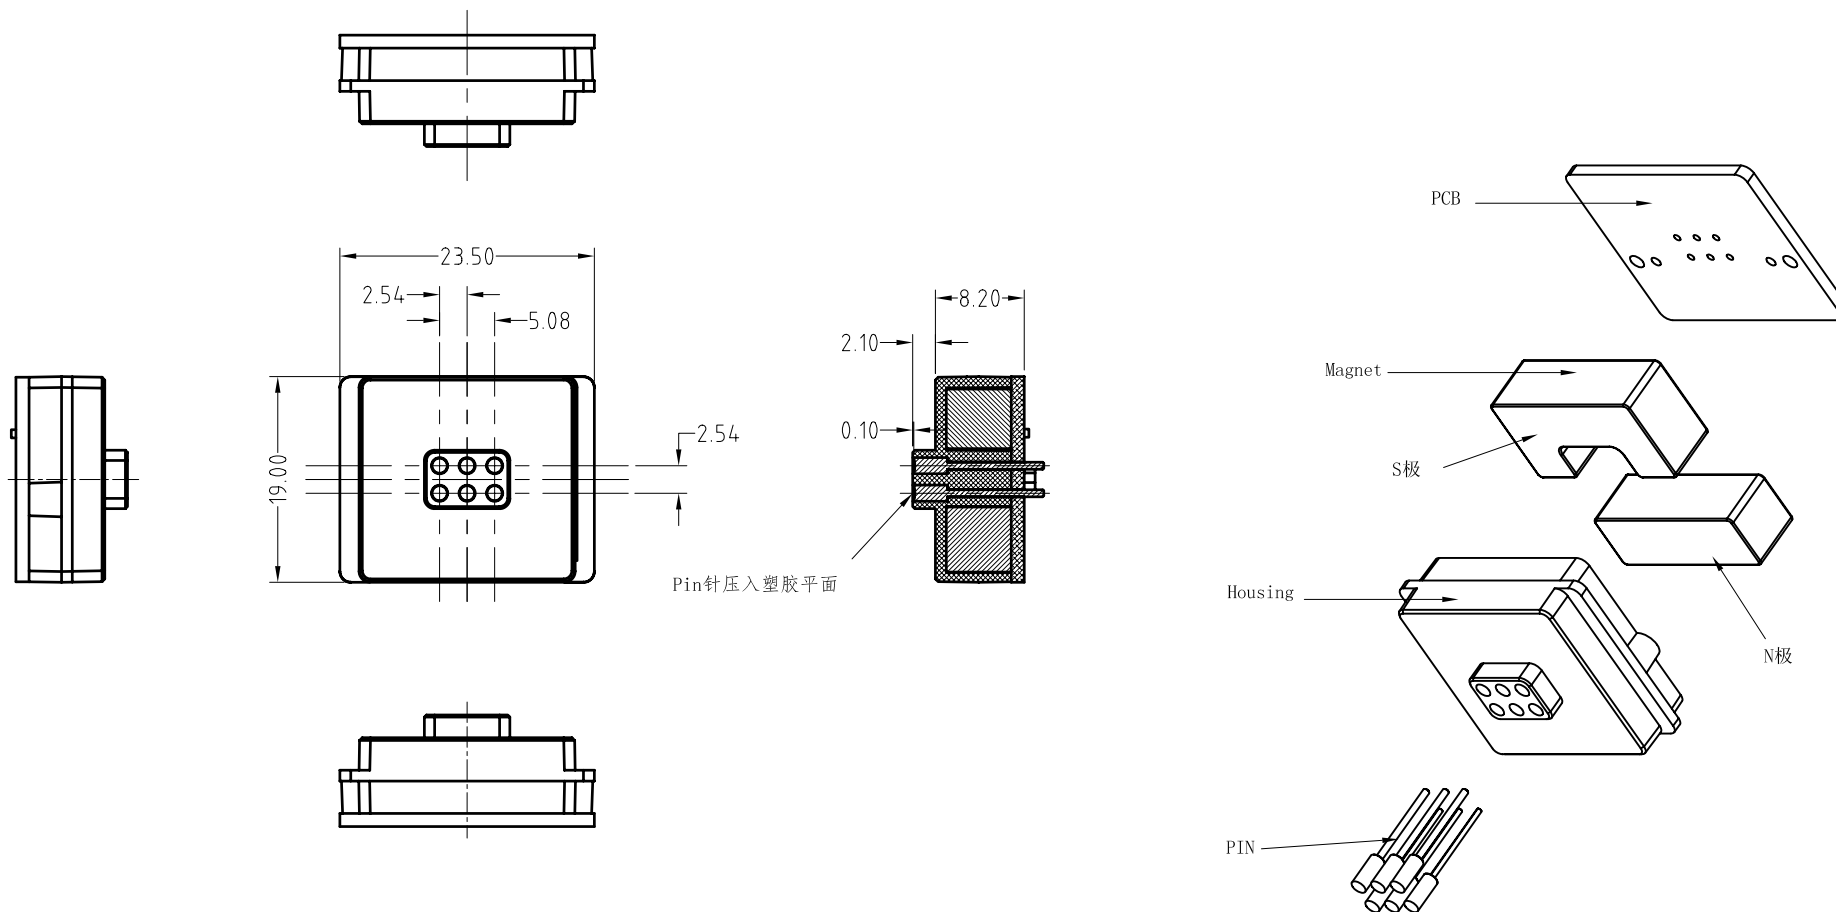

BOM

No.	Qty	Part	Spec
B238-F2000	1	PCBA	电路板
B238-M1100	1	Magnet	N38 钕铁硼 表面镀镍
B238-M2100	1	Magnet	N38 钕铁硼 表面镀镍
H254-06H02	1	Housing	黑色 HTN U1 94 V-0
B238-W1010	6	Pin	黄铜 C3604 表面镀金0.25um

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			SHEET: 1 of 1	PART NO.
	0~6	±0.05			FILE NAME	BP238XX
	6~30	±0.10			TITLE	Pogo pin connector
	30~150	±0.15				
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			APPRO			

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2015.08.19	NEW