




Note:
 Mechanical:
 .Contact force: 70g±20g at 1.0mm working stroke
 .Life test: 20,000 cycles
 Electrical:
 .Rated current & voltage: DC 12V; 1A
 .Contact resistance: 50 milliohm Max.
 100% open & short test.

To ensure the best usage, please operate it based on the working height.
 Based on the engineering drawings, shall not exceed the maximum allowed compression.


A



USB

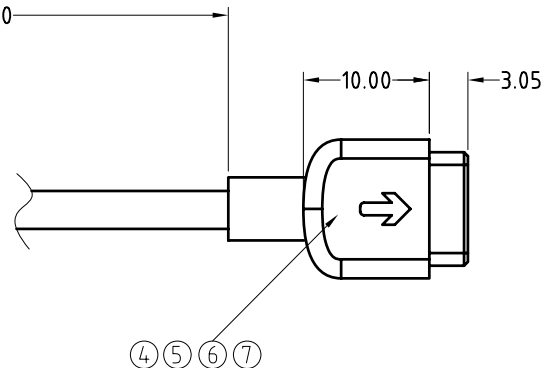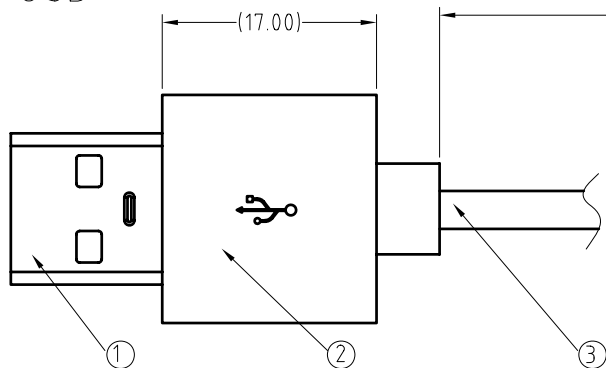


Pogo pin conn



非焊接示意图

B

7	Alloy Connector <合金接头>	M-BP24011-02254H0A	1
6	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
5	White PVC 45P <白色PVC 45P>	B000-P0001	1
4	OD2.50 2C 26AWG White Jacket TPE 55P 1840mm <OD2.50 2芯 26AWG 白色 外被TPE 55P 1840mm>	X002-0121-XXXX	1
3	White PVC 45P <白色PVC 45P>	B000-P0001	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	USB/AM 0.025um Au white salt spray test 48H <USB/AM 0.025um金 白色 盐雾24小时>	B000-U1001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

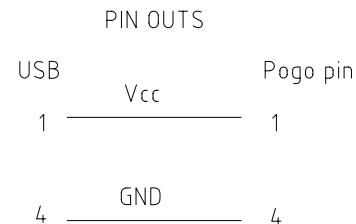

C

D

	A1	2016.09.05	修改线材和USB
	A0	2014.08.25	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±1°	A4	
0~6	±0.05		
6~30	±0.10	DRAW	SHEET: 1 of 1
30~150	±0.15	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO		



PART NO.	CM-BP24011-02254H0A
FILE NAME	BP240XX
TITLE.	Pogo pin connector