


Note: <注意>
 Mechanical: <机械性能>
 .Contact force: 80g±20g at 1.1mm working stroke
 <接触弹力: 80g±20g在1.1mm的工作行程>
 .Full stroke: 1.60mm
 <最大行程: 1.60mm>
 .Life test: 20,000 cycles
 <寿命: 20000次>
 Electrical: <电气性能>
 .Rated current & voltage: DC 12V, 2A Max.
 <额定电压, 电流: DC 12V, 2A>
 .Contact resistance: 50 milliohm Max.
 <接触阻抗: 50 milliohm Max.>
 100% open & short test.
 <100%导通, 短路测试>
 专利号: ZL201420146582.X





Approve Sign

USB

CONN

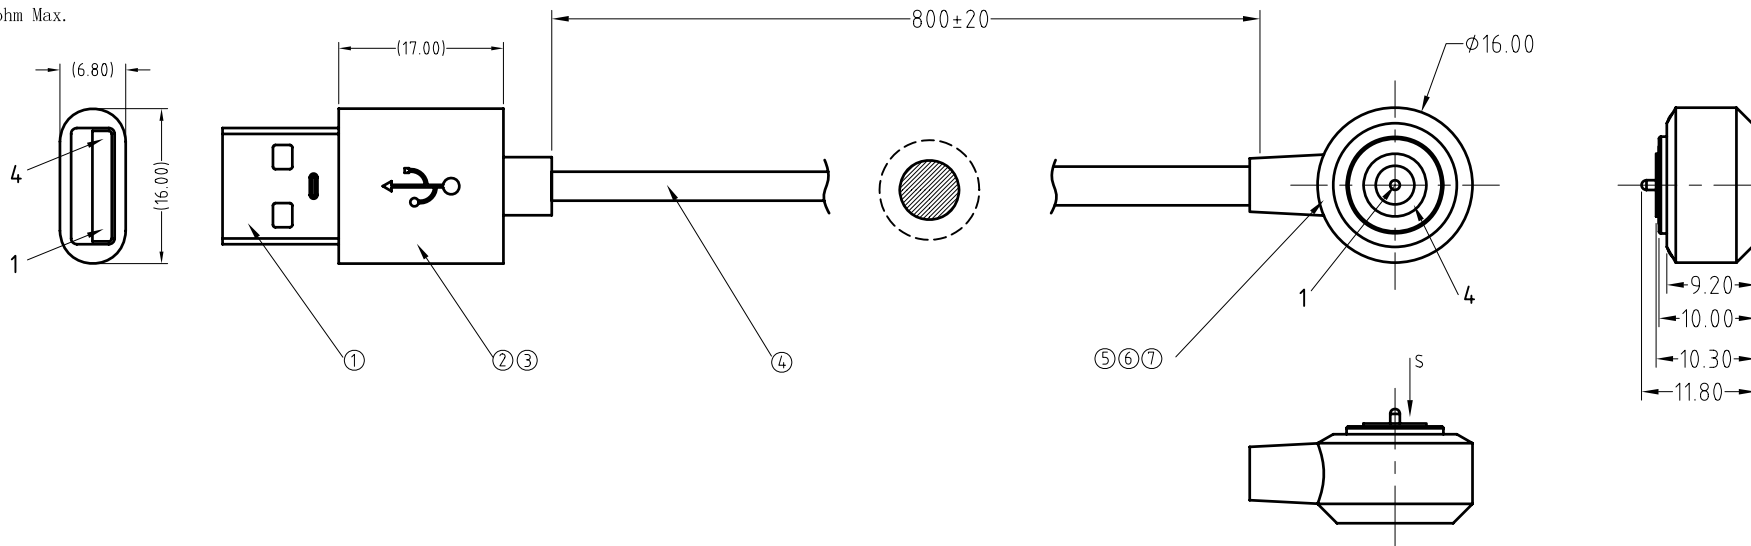

7	Mag conn <磁铁接头>	M-BP83111-01000H0A	1
6	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
5	White PVC <白色PVC>	B000-P0001	1
4	2C 24AWG OD3.0 White Jacket TPE 80A 840mm <2芯 24AWG 外径3.0 白色 外被TPE 80A 840mm>	X002-0123-XXXX	1
3	White PVC <白色PVC>	B000-P0001	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	USB/AM 0.025um Au white salt spray test 48H <USB/AM 0.025um金 白色 盐雾48小时>	B000-U1001	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

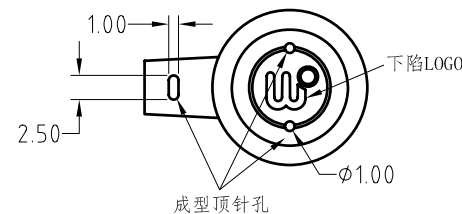

	A1	2017.04.01	胶芯颜色由黑色改为白色
	A0	2017.01.04	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±2°	A4	SHEET: 1 of 1	
0~6	±0.10			
6~30	±0.20	DRAW		
30~150	±0.30	CHECK	PART NO.	CM-BP83111-01000H0A
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			FILE NAME	BP831XX
APPRO			TITLE	Magnetic Cable Connector

