



Note: <注意>
 Mechanical: <机械性能>
 .Contact force: 80g±20g at 1.1mm working stroke
 <接触弹力: 80g±20g在1.1mm的工作行程>
 .Full stroke: 1.60mm
 <最大行程: 1.60mm>
 .Life test: 10,000 cycles
 <寿命: 10000次>
 Electrical: <电气性能>
 .Rated current & voltage: DC 12V, 1A .
 <额定电压, 电流: DC 12V, 1A>
 .Contact resistance: 50 milliohm Max.
 <接触阻抗: 50 milliohm Max.>
 100% open & short test.
 <100%导通, 短路测试>
 专利号: ZL201420146582.X



Approve Sign

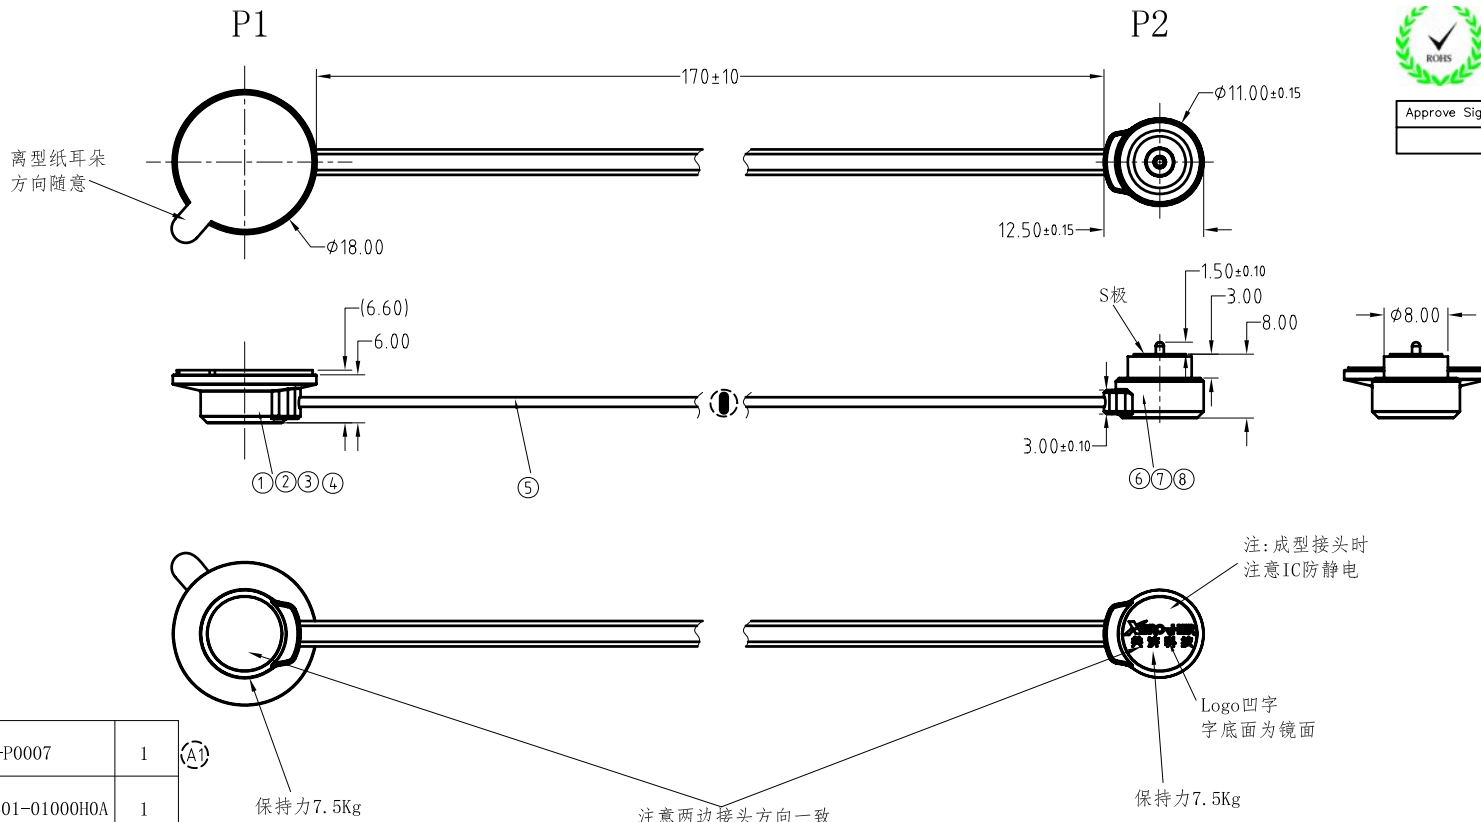

8	Black PVC 35P 1.5g <内模黑色 PVC 35P 1.5g>	B000-P0007	1	(A1)
7	Magnetic Connector <磁吸接头>	M-BP89601-01000H0A	1	
6	Black PVC 35P 3g <黑色外被 PVC 35P 3g>	B000-P0007	1	
5	3.2*1.3 4C 16*0.08 Black Jacket PVC 55P 200mm 3.2*1.3 4芯 16*0.08漆包线 黑色PVC 55P 200mm	X104-0212-XXXX	1	
4	Brass Barrel 4.6*3.8mm <铜管直径4.6*3.8mm>	B896-C3100	1	
3	Red 3M-4229P <带红色离型纸不干胶3M-4229P双面胶>	B896-E1000	1	(A1)
2	Black PVC 35P 2.5g <内模黑色 PVC 35P 2.5g>	B000-P0007	1	
1	Bottom Black ABS UL94 V-0 <外壳 黑色ABS UL94 V-0>	B896-H1000	1	
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)	



SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±2°	A4	
0~6	±0.10		SHEET: 1 of 1
6~30	±0.20	DRAW	
30~150	±0.30	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	



PART NO.	CM-BP89601-01000H0A
FILE NAME	BP896XX
TITLE	Magnetic Cable / 磁吸充电线

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A1	2017.07.28	一面离型纸增加助撕耳朵, 修改3M胶规格接头端增加内模
	A0	2017.06.09	NEW