


Note:<注意>
 Mechanical:<机械性能>
 Contact force: 70g±20g at 1.0mm working stroke
 <接触弹力: 70g±20g在1.0mm的工作行程>
 Full stroke:1.40mm
 <最大行程: 1.40mm>
 Life test: 20,000 cycles
 <寿命: 20000次>
 Electrical:<电气性能>
 Rated current & voltage: DC 12V, 1A
 <额定电压, 电流: DC 12V, 1A>
 Contact resistance: 50 milliohm Max.
 <接触阻抗: 50 milliohm Max.>
 100% open & short test.
 <100%导通,短路测试>



Approve Sign

CONN

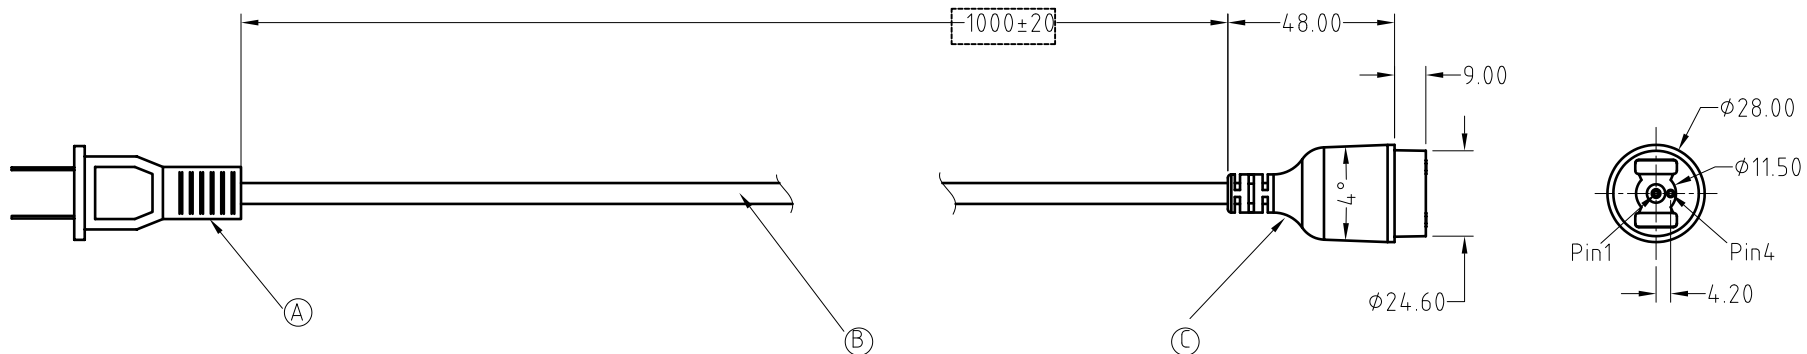

Plug→CONN
1_Vcc_Red_1
4_GND_Black_4

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±2°	A4			
0~6	±0.10				SHEET: 1 of 1
6~30	±0.20	DRAW			PART NO. CM-BP51021-02420H0M
30~150	±0.30	CHECK	FILE NAME BP510XX	TITLE. Magnetic Cable Connector	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	D0	2015.09.16	NEW