

Note:<注意>

Electrical:<电气性能>

.Rated current & voltage: DC 12V, 2A

<额定电压, 电流: DC 12V, 2A>

.Contact resistance: 50 milliohm Max.



<接触阻抗: 50 milliohm Max.>

100% open & short test.


<100%导通,短路测试>



Approve Sign

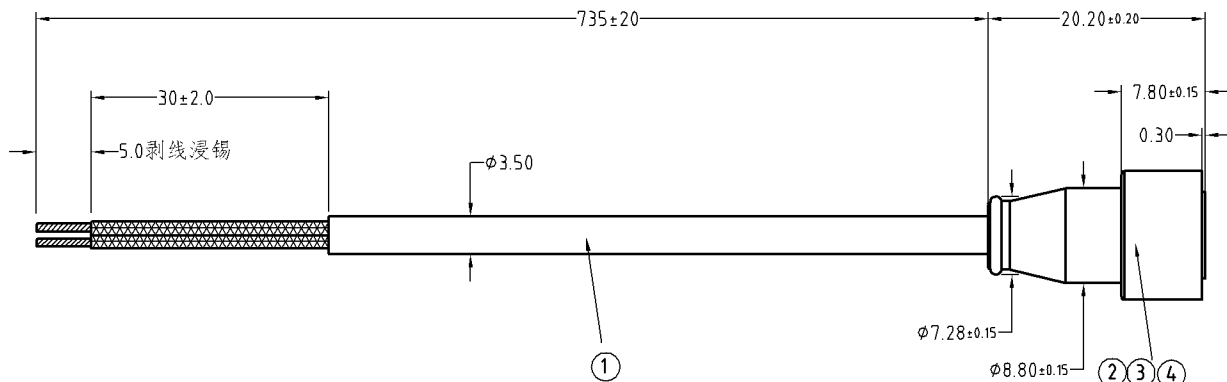

接线方式



4	Pogo Pin connector 磁吸接头	M-BP14.202-01000H0B	1
3	Black PVC 4SP 5g 黑色 外被 PVC 4SP 5克	B000-P0002	1
2	Lucency PE 3g <透明 PE 3克>	B000-P9001	1
1	UL2464 OD3.5 2C 22AWG Black Jacket PVC 5SP 775mm UL2464 OD3.5 2芯 22AWG 黑色 外被PVC 5SP 775mm>	X002-0208-XXXX	1
序号 (NO.)	规格 (Specification)	料号 (P/N)	数量 (Qty)

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	<b>CFE</b> 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±2°	A4			
0-6	±0.10		SHEET: 1 of 1	PART NO.	CM-BP62621-01000H0B
6-30	±0.20	DRAW		FILE NAME	BP626XX
30-150	±0.30	CHECK		TITLE	Magnetic Cable Connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2016.05.07	NEW